



WCCO Belting, Inc.

Chevron Top Conveyor Belting

2 Ply "ULTIMATE 1" Continuous Chevron 150 lb. Poly/Nylon, .252 OAG
 (Over all gauges-thickness)

Westward Parts Bulk Grain Belt Conveyor replacement belts fit all major OEM conveyor belt 15 inch and 20 inch applications. Replace a complete or partial Brandt, Batco, or Meridian conveyor belt for substantial savings to your customers.

WCCO's COBRA™ belt construction is a premium design for applications that require flexing and trough-ability.

The fabric within COBRA™ is a plain-weave, polyester-nylon filament fabric. Engineered with nylon filaments in the weft direction, it promotes curving and flexibility during operation. The COBRA™ belt construction is available in multiple texture, pattern and cleat options.



Microscopic view of COBRA™ filament threads and plain weave.



CHEVRON (CT) PATTERN COVER
 Pattern Height - 0.125 in (3.8 mm)
 Used in multiple applications to improve the movement of materials.

Part Number	Description	FITS
BEL1005052	Chevron Top Conveyor Belt - 15" 2 Ply .252"	Batco, Brandt
BEL1005053	Chevron Top Conveyor Belt - 20" 2 Ply .252"	Batco, Brandt, Meridian

Note: Westward Parts can source many other items that may not be listed in this flyer, please visit our website at westwardparts.com or call us directly at 1-888-937-7278. Our team will help you find what you need.

September 2017




Ready Set™ Staple System

With pre-inserted staples and a one-piece strip design, Alligator® Ready Set™ makes splicing quick and easy.

The Alligator® Ready Set™ Staple Fastener System is ideal for a wide variety of light- and medium-duty fastener applications. Designed for light and medium-duty synthetic carcass belting, the Alligator® Staple fastener utilizes high tensile, stainless steel staple attachment, in conjunction with an extended plate design. This design separates the point of fastener penetration from the line of belt flexing to eliminate splice fatigue at the point of belt attachment.

Features and Benefits:

- Strong and impact-resistant splice
- Abrasion resistant splice
- The front edge of the fastener is beveled to allow it to interface smoothly with conveyor components
- Available in steel & stainless steel

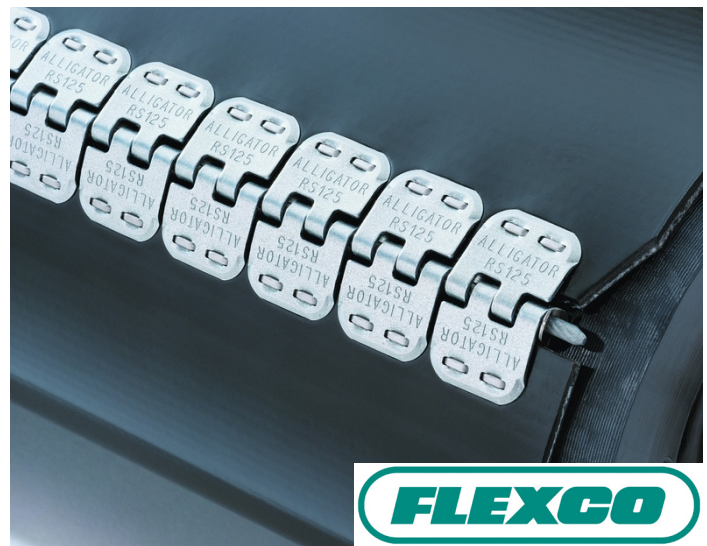

Applications:

- Belts from 1/16" – 1/4" (1.5 – 6.4 mm) thick, with mechanical fastener ratings up to 200 PIW (35 kn/m) and minimum pulley diameters from 2" – 4" (50 - 102 mm)

Part Number	Description
LACRS125J16NC	16" RS125 Steel Fasteners - Box of 4
LACRS125J16SS	16" RS125 Stainless Steel Fasteners - Box of 4
LACRS125J20NC	20" RS125 Steel Fasteners - Box of 4
LACRS125J20SS	20" RS125 Stainless Steel Fasteners - Box of 4

Note: Westward Parts can source many other items that may not be listed in this flyer, please visit our website at westwardparts.com or call us directly at 1-888-937-7278. Our team will help you find what you need.

September 2017